

## VORNADO AIR CIRCULATION SYSTEMS, INC. LIMITED 5-YEAR WARRANTY

### CONDITIONS

Vornado Air Circulation Systems, Inc. warrants to the original consumer or purchaser that this Vornado Air Circulator is free from any defects in material or workmanship for the length of term as described above. If any such defect is discovered within the warranty period, Vornado Air Circulation Systems, Inc., at its discretion, will repair or replace the unit.

### INSTRUCTIONS

For warranty service, call 1-800-234-0604 to obtain a Return Authorization (RA). After receiving the RA form, ship your Air Circulator postage-paid with a check or money order for \$15.00 to cover return shipping and handling along with a copy of original dated receipt of purchase to:

Vornado Air Circulation Systems, Inc.  
Attn: Warranty & Repair  
415 East 13th Street  
Andover, KS 67002

To assure proper handling, packages must be clearly marked with the RA number. Packages not clearly marked with the RA number can be refused at the receiving dock.

### COVERAGE

This limited warranty covers parts failure or manufacturing flaw. It does not apply to defects resulting from abuse of the unit, modification, alteration, repair or service by anyone one other than Vornado Air Circulation Systems, Inc., mishandling, improper maintenance, commercial use of the unit, damages which occur in shipment or are attributable to acts of God.

THIS WARRANTY IS THE ONLY ONE WE GIVE ON YOUR VORNADO AIR CIRCULATOR. IT SETS FORTH ALL OUR RESPONSIBILITIES REGARDING YOUR VORNADO AIR CIRCULATOR. THERE ARE NO EXPRESSED WARRANTIES EXCEPT AS LISTED ABOVE. VORNADO AIR CIRCULATION SYSTEMS, INC. SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. ALL EXPRESSED AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY (AN UNWRITTEN WARRANTY THAT THE PRODUCT IS FIT FOR ORDINARY USE), AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED TO THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or a limitation on how long the implied warranties last; so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights and you may have other rights that vary from state to state.

Please allow 3-5 weeks for repair and return of your Air Circulator.  
Specifications subject to change without notice. Patent Pending.

For your records:

Serial No. \_\_\_\_\_  
(located on product specs decal)

©2004 Vornado Air Circulation Systems, Inc. Andover, KS 67002

Vornado Consumer Services

P 1-800-234-0604 W [www.vornado.com](http://www.vornado.com) E [consumerservice@vornado.com](mailto:consumerservice@vornado.com)

CL3-0085 Rev -

THE RETURN OF A CLASSIC  
**Vornado®**  
WORLD'S FINEST AIR CIRCULATORS




## INSTRUCTION MANUAL

READ AND SAVE THESE  
IMPORTANT INSTRUCTIONS



For questions or more information  
**1-800-234-0604**

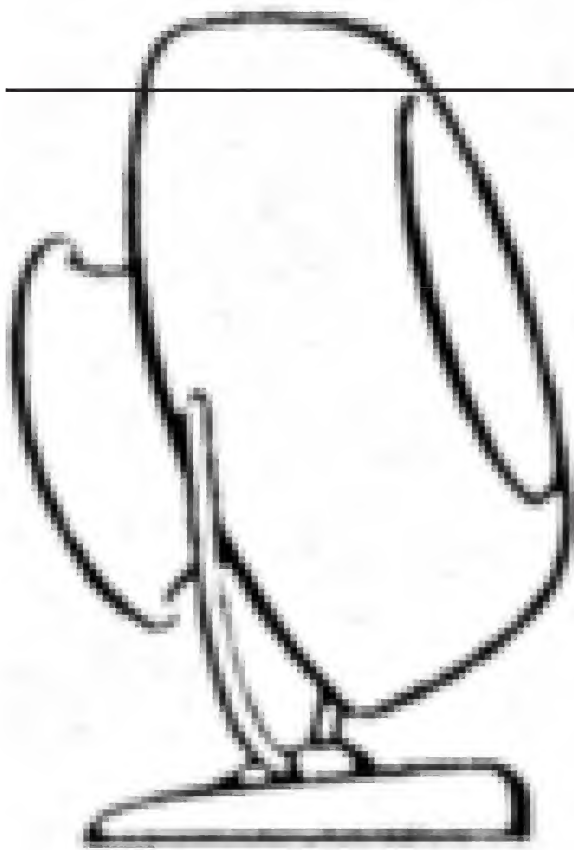


## THE RETURN OF A CLASSIC

Good design is timeless. As our special 60th anniversary edition, we reintroduce to you the *original* VORNADOFAN™. In true form this replica adorns a distinct Vornado design from the mid-twentieth century, the streamlined age. This *classic styling* adapts perfectly to any setting and blends harmoniously with all decoration and color schemes. Made with high standards and the finest materials, the VORNADOFAN™ delivers unparalleled whole room air circulation - *quality* you've come to expect. In comfort and beauty, VORNADO is the aristocrat of all air circulators.

---

## HOW TO USE




The Vornado™ is built with a 3-speed motor. The speed control knob is located on the back cap. Speed "I" is the lowest setting, "II" is medium setting, "III" is the highest setting and "0" is the off position.

*Step 1:* Position your Vornado™ so the beam of air has an unobstructed path from one side of the room to the other.

*Step 2:* Set speed to medium and allow a few minutes for an airflow pattern to be established (different airflow patterns can be established by changing the location, angle, and speed of the Vornado™).

*Step 3:* Adjust the speed accordingly until desired comfort level is achieved. You will quickly determine the precise amount of circulation required to maintain personal comfort in a given room for the prevailing temperature and humidity conditions. Once you discover the added comfort of air circulation, you will use your Vornado™ season after season.

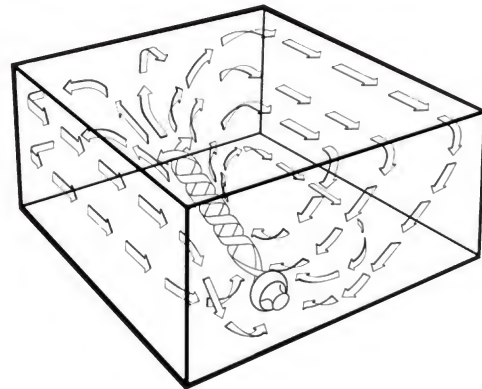

## IMPORTANT INSTRUCTIONS

Your Vornadofan™ has a polarized plug (one prong is wider than the other). To reduce the risk of electric shock, this plug is intended to fit in a polarized outlet only one way, if the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not attempt to defeat this safety feature.

**WARNING** – To reduce the risk of fire or electric shock, do not use this product with any solid-stat speed control device.

Clean your Vornadofan™ regularly

**Do** unplug it before cleaning.

**Do Not** use gasoline, thinners, solvents, ammonias, or other chemicals for cleaning.

**Do Not** immerse in water or allow water to drip in the motor housing.

Use your Vornadofan™ season after season, year after year.

**Do Not** use immediately next to furnaces, fireplaces, stoves, or other high temperature heat sources.

Use common sense when using your Vornadofan™ or any electrical appliance.

**Do Not** position too close to draperies as they may be drawn into the rear grill cutting off airflow.

**Do Not** use on wet surfaces.

**Do Not** use outdoors.

**Do Not** use if power cord becomes frayed or brittle. attempt to repair or replace parts.



## CLEANING & MAINTENANCE



The motor is permanently lubricated and requires no oiling. Because your Vornadofan™ moves a substantial amount of air, it will need regular cleaning. Unplug the unit before any cleaning activity.

**TO CLEAN GRILL:** Remove grill (see grill removal instructions) and dust or wash with a mild dishwashing soap. Do not place grill in dishwasher.

**TO CLEAN BASE:** Wipe with a damp cloth.

**TO CLEAN BLADE:** Wipe with a damp cloth. If your Vornadofan™ is used in a greasy environment such as a kitchen, mild soap may be necessary. Do not use solvents.

**TO CLEAN MOTOR CAP AND INLET GUARD:** Use a common household vacuum. Do not use water to clean these parts of the Vornadofan™.



**TO REMOVE GRILL:** To protect paint, apply masking tape over the head of a flat screwdriver. Place a flat screwdriver against the angled section of the grill support tabs, (as shown) and press outward to allow the grill wire to be released from the support tabs. Repeat on second grill support tab. To reinstall relocate grill wire ends into the support tabs, use the flat screwdriver to flex back the support tabs to allow grill to snap into place. Be sure all three grill wire ends are engaged.



**TO REMOVE BLADE:** It is possible to remove the blade should something accidentally get wrapped around the motor shaft. Pull the blade straight out from the shaft. When replacing, the blade can only go on the shaft one way. Push the blade all the way on the shaft until it bottoms out. Do not use a hammer as this could result in bearing damage.